

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/032603 A1

(51) International Patent Classification: A01D 45/00

(74) Agent: BAILEY, Richard, Alan; Marks & Clerk, 27 Imperial Square, Cheltenham GL50 1RQ (GB).

(21) International Application Number:
PCT/GB2003/004069

(81) Designated States (national): AI, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GI, GM, GR, GU, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SI, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
23 September 2003 (23.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0223683.4 11 October 2002 (11.10.2002) GB

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): HAY-GROVE LIMITED (GB/GB); Redbank, Lodbury, Herefordshire HR8 2JL (GB).


Published:

— with international search report

(72) Inventor; and
(75) Inventor/Applicant (for US only): CORBETT, Thomas, Robert (GB/GB); St Johns House, Westhupp, Herefordshire HR4 8BU (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HARVESTING APPARATUS

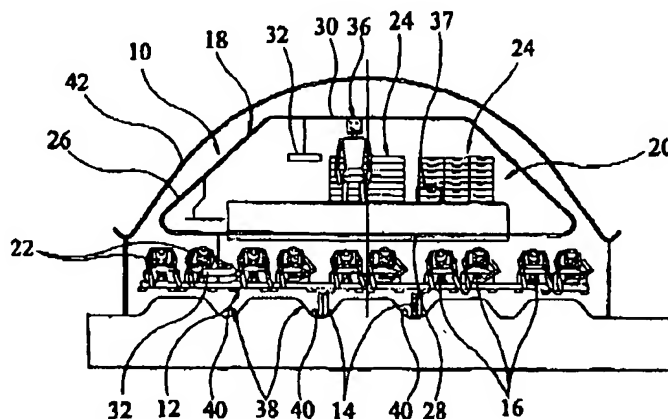

(57) Abstract: Harvesting apparatus (10) has a support structure (12), a plurality of driven rotatable members (14) by which the support structure (12) can be moved, and a body support element (16) supported by the support structure (12). The body support element (16) is able to support a picker (22) and is slidable relative to the support structure (12) so that, when the harvesting apparatus (10) is moving in a first direction, the body support element (16) can be selectively positioned relative to the support structure (12) to optimise the position of the picker (22) relative to the occurrence of produce to be picked. Preferably, a conveyor system (18) and collection area (20) are also included on the support structure (12). The conveyor system (18) enables transportation of produce placed thereon by the picker (22) to the collection area (20) for packing. A method is also provided.

BEST AVAILABLE COPY